

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 March 2004 (25.03.2004)

PCT

(10) International Publication Number
WO 2004/025277 A1

(51) International Patent Classification⁷: G01N 13/02,
B01L 3/00

(FI). SUOMALAINEN, Pekka [FI/FI]; Kalliopohjantie
14 as. 10, FIN-04300 Tuusula (FI). KINNUNEN, Paavo
[FI/FI]; Punarinnantie 4, FIN-02660 Espoo (FI).

(21) International Application Number:
PCT/FI2003/000671

(74) Agent: OY JALO ANT-WUORINEN AB; Iso
Roobertinkatu 4-6 A, FIN-00120 Helsinki (FI).

(22) International Filing Date:
15 September 2003 (15.09.2003)

(81) Designated States (*national*): AE, AG, AL, AM, AT (util-
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE
(utility model), EE, EG, ES, FI (utility model), FI, GB, GD,
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT (utility
model), PT, RO, RU, SC, SD, SE, SG, SK (utility model),
SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20021643 13 September 2002 (13.09.2002) FI

(71) Applicant (*for all designated States except US*): KIBRON
INC. OY [FI/FI]; Unioninkatu 45 K, FIN-00170 Helsinki
(FI).


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): JOHANS, Christof-
fer [FI/FI]; Metsätöntunkuja 4 H 44, FIN-02200 Espoo

[Continued on next page]

(54) Title: METHOD FOR SURFACE TENSION MEASUREMENT

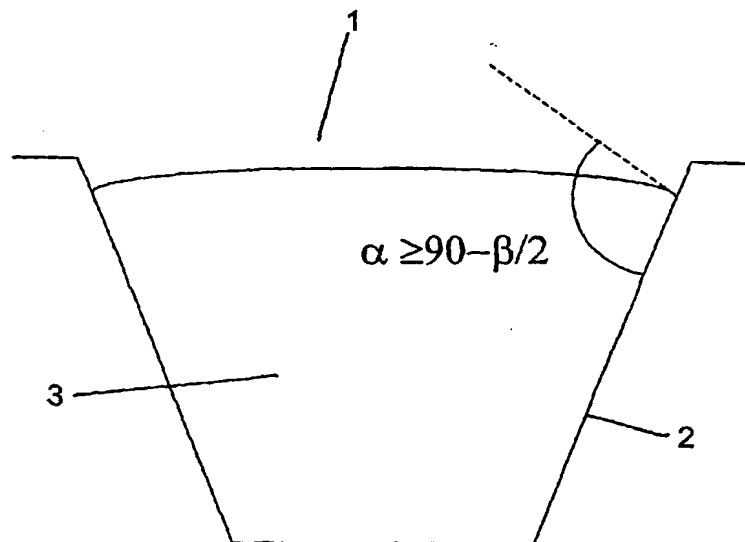

(57) Abstract: The present invention is directed to a method for measuring the surface tension of a sample comprising providing a well plate, containing at least one well defined by well walls and an opening and forming a space for receiving the sample to be tested, bringing a probe in contact with the surface of the sample in the well, and measuring the force applied to the probe by the sample, characterized in that the walls of the well are inclined with respect to the plane defined by the opening of the well so that the cross section of the well is decreasing in the direction from the opening of the well towards the bottom of the same, so as provide a geometry resulting in a flat or convex shape of the meniscus of the sample when in the well and that at least the surface of the wall of the well facing the sample space comprises an antistatic material, and providing means for dissipating static electricity from the well. The invention also concerns a well plate for use in the method.

WO 2004/025277 A1